


COLORDash Par-H7XM

User Manual

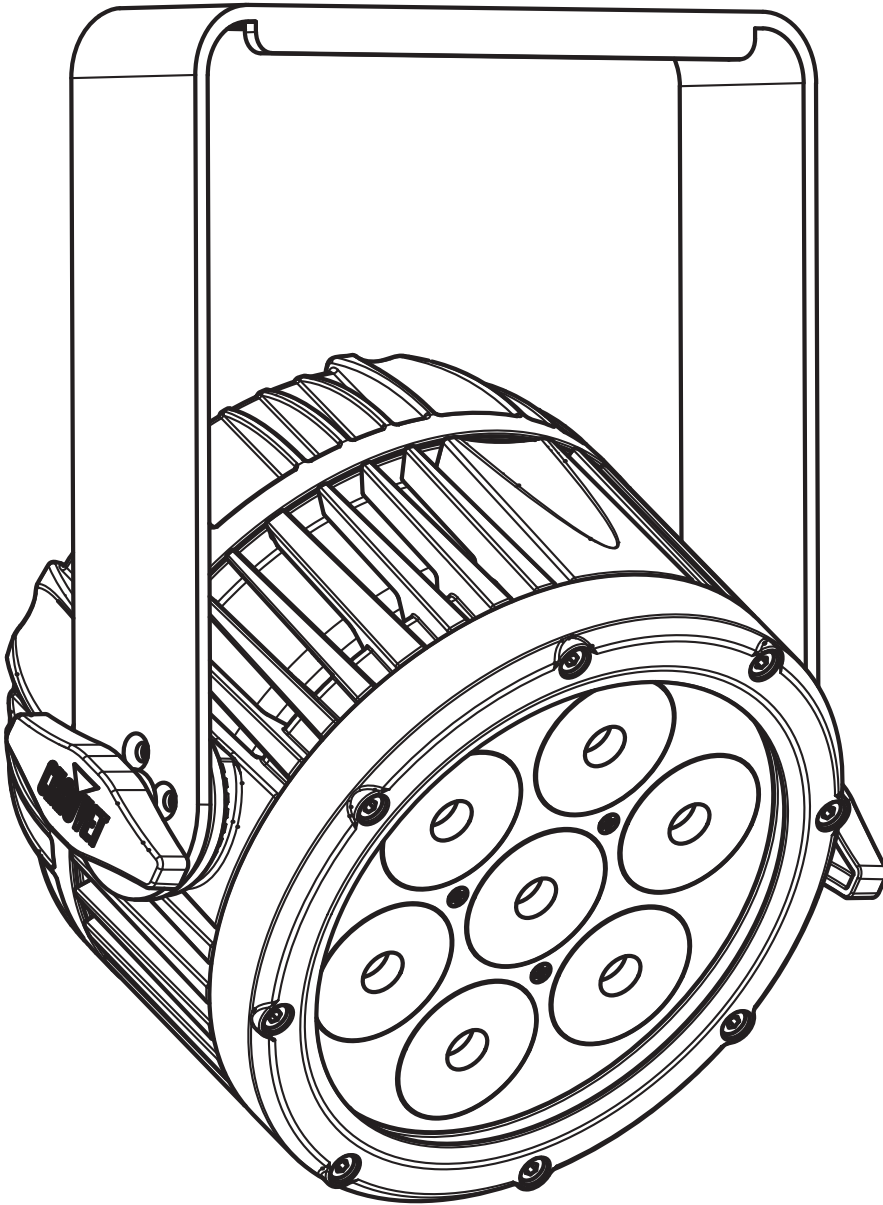

Model ID: COLORDASHPARH7XM

Edition Notes

The COLORdash Par H7XM User Manual includes a description, safety precautions, installation, programming, operation, and maintenance instructions for the COLORdash Par H7XM as of the release date of this edition.

Trademarks

Chauvet, Chauvet Professional, the Chauvet logo, and COLORdash are registered trademarks or trademarks of Chauvet & Sons, LLC (d/b/a Chauvet and Chauvet Lighting) in the United States and other countries. Other company and product names and logos referred to herein may be trademarks of their respective companies.

Copyright Notice

The works of authorship contained in this manual, including, but not limited to, all designs, text, and images are owned by Chauvet.

© Copyright 2026 Chauvet & Sons, LLC. All rights reserved.

Electronically published by Chauvet in the United States of America.

Manual Use

Chauvet authorizes its customers to download and print this manual for professional information purposes only. Chauvet expressly prohibits the usage, copy, storage, distribution, modification, or printing of this manual or its content for any other purpose without written consent from Chauvet.

Document Printing

For best results, print this document in color, on letter size paper (8.5 x 11 in), double-sided. If using A4 paper (210 x 297 mm), configure the printer to scale the content accordingly.

Intended Audience

Any person installing, operating, and/or maintaining this product should completely read through the guide that shipped with the product, as well as this manual, before installing, operating, or maintaining this product.

Disclaimer

Chauvet believes that the information contained in this manual is accurate in all respects. However, Chauvet assumes no responsibility and specifically disclaims any and all liability to any party for any loss, damage, or disruption caused by any errors or omissions in this document, whether such errors or omissions result from negligence, accident, or any other cause. Chauvet reserves the right to revise the content of this document without any obligation to notify any person or company of such revision. However, Chauvet has no obligation to make, and does not commit to make, any such revisions.

Document Revision

Go to www.chauvetprofessional.com for the latest version.

Revision	Date	Description
2	09/2026	Added DMX connectivity to Set up section. Added note to Introduction section.

TABLE OF CONTENTS

1. Before You Begin	1
What Is Included	1
Claims	1
Text Conventions	1
Symbols	1
Safety Notes.....	2
FCC Statement of Compliance	3
Expected LED Lifespan.....	3
2. Introduction	4
Features	4
Product Overview.....	4
Product Dimensions	5
3. Setup	6
AC Power	6
AC Plug	6
Power Linking.....	6
DMX Connection	6
DMX Personalities.....	6
Optional Junction Box installation	7
Remote Device Management.....	7
Master/Slave Connectivity.....	7
USB Software Update	8
Mounting	9
Orientation.....	9
Rigging	9
Procedure.....	9
4. Operation	10
Control Panel Description	10
Control Options	10
Programming.....	10
Passcode	10
Menu Map	10
DMX Configuration.....	13
DMX Personalities.....	13
Starting Address.....	13
DMX Channel Assignments and Values	14
14CH / 13CH	14
9CH / 8CH / 6CH.....	15
Standalone Configuration.....	15
Static Mode	15
Fixed Color.....	15
Color Temperature.....	15
Manual Color Mixer.....	15
Auto Show	16
Settings Configuration.....	16
Master/Slave	16

Dimmer Speed	16
White Balance	16
LED Frequency	16
Back Light	16
Key Lock	16
Information	17
Factory Reset.....	17
System Update.....	17
5. Maintenance.....	18
Marine Fixture Maintenance.....	18
Overview	18
Maintenance.....	18
Torque Measurements	19
Vacuum Test Measurements	19
6. Technical Specifications	20
Contact Us	21
Warranty & Returns.....	21

Before You Begin

1. Before You Begin

What Is Included

- COLORdash Par H7XM
- Quick Reference Guide

Claims

Carefully unpack the product immediately and check the container to make sure all the parts are in the package and are in good condition.

If the box or the contents (the product and included accessories) appear damaged from shipping, or show signs of mishandling, notify the carrier immediately, not Chauvet. Failure to report damage to the carrier immediately may invalidate a claim. In addition, keep the box and contents for inspection.

For other issues, such as missing components or parts, damage not related to shipping, or concealed damage, file a claim with Chauvet within 7 days of delivery.

Text Conventions

Convention	Meaning
1–512	A range of values
50/60	A set of values of which only one can be chosen
Settings	A menu option not to be modified
<ENTER>	A key to be pressed on the product's control panel

Symbols

Symbol	Meaning
	Critical installation, configuration, or operation information. Not following these instructions may make the product not work, cause damage to the product, or cause harm to the operator.
	Important installation or configuration information. The product may not function correctly if this information is not used.
	Useful information.



Any reference to data or power connections in this manual assumes the use of Seetronic IP-rated cables.



The term “DMX” used throughout this manual refers to the USITT DMX512-A digital data transmission protocol.

Connection of the control signal: DMX line

- The product has XLR sockets for DMX input and output.
- Notice: This control circuit is isolated and belongs to the Class 2 data port.

The control circuit has a cumulative leakage current of less than 3.5 mA.

Safety Notes

Read all the following safety notes before working with this product. These notes contain important information about the installation, usage, and maintenance of this product.



This product contains no user-serviceable parts. Any reference to servicing in this User Manual will only apply to properly trained, certified technicians. Do not open the housing or attempt any repairs.



All applicable local codes and regulations apply to proper installation of this product.

- The luminaire is intended for professional use only.
- The luminaire should be positioned so that prolonged staring into the luminaire at a distance closer than 1.6 ft (0.5 m) is not expected.
- If the external flexible cable or cord of this luminaire is damaged, it shall be replaced by a special cord or cord exclusively available from the manufacturer or its service agent.
- The light source contained in this luminaire shall only be replaced by the manufacturer or its service agent or a similar qualified person.
- **CAUTION:**
 - This product's housing may be hot when operating. Mount this product in a location with adequate ventilation, at least 20 in (50 cm) from adjacent surfaces.
 - When transferring the product from extreme temperature environments, (e.g., cold truck to warm humid ballroom) condensation may form on the internal electronics of the product. To avoid causing a failure, allow the product to fully acclimate to the surrounding environment before connecting it to power.
 - Flashing light is known to trigger epileptic seizures. User must comply with local laws regarding notification of strobe use.
- **ALWAYS:**
 - Disconnect from power before cleaning the product.
 - When using an IP65-rated product in an outdoor environment, use IP65- (or higher) rated power and data cable.
 - Use a safety cable when mounting this product overhead.
 - Connect this product to a grounded and protected circuit.
 - Create a drip loop to ensure appropriate space for maintenance and prevent water from accumulating at the end of the wire around the fixture.
 - Install the fixture so that the connections panel faces downwards in wet environments.
 - Replace the display cover when not in use to protect the display.
- **DO NOT:**
 - Open this product. It contains no user-serviceable parts.
 - Look at the light source when the product is on.
 - Leave any flammable material within 50 cm of this product while operating or connected to power.
 - Connect this product to a dimmer or rheostat.
 - Operate this product if the housing, lenses, or cables appear damaged.
 - Submerge this product (adhere to standards for the published IP rating). Regular outdoor operation is fine.
 - Mount the fixture in direct contact with other metals, as this may encourage corrosion.
 - Permanently install outdoors in locations with extreme environmental conditions. This includes, but is not limited to:
 - Locations where normal temperatures exceed the temperature ranges in this manual.
 - Locations that are prone to flooding or being buried in snow.
 - Other areas where the product will be subject to extreme radiation or caustic substances.
- ONLY use the hanging/mounting bracket to carry this product.
- The maximum ambient temperature is 113 °F (45 °C). Do not operate this product at higher temperatures.
- The minimum ambient temperature is -14°F (-10°C). Do not start the product at lower temperatures.
- To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.

Before You Begin

- In the event of a serious operating problem, stop using immediately.



If this Chauvet product requires service, contact Chauvet Technical Support.

FCC Statement of Compliance

This device complies with Part 15 Part B of the FCC rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Expected LED Lifespan


Over time, use and heat will gradually reduce LED brightness. Clustered LEDs produce more heat than single LEDs, contributing to shorter lifespans if always used at full intensity. The average LED lifespan is 40,000 to 50,000 hours. To extend LED lifespan, maintain proper ventilation around the product, and limit the overall intensity.

2. Introduction

Features

- Rugged RGBWA-UV LED wash with C5-X marine grade coating for events in demanding conditions.
- At home in any weather conditions and any environment with IP-rated power and DMX connections.
- Heavy duty single yoke for rock solid installation.

Product Overview


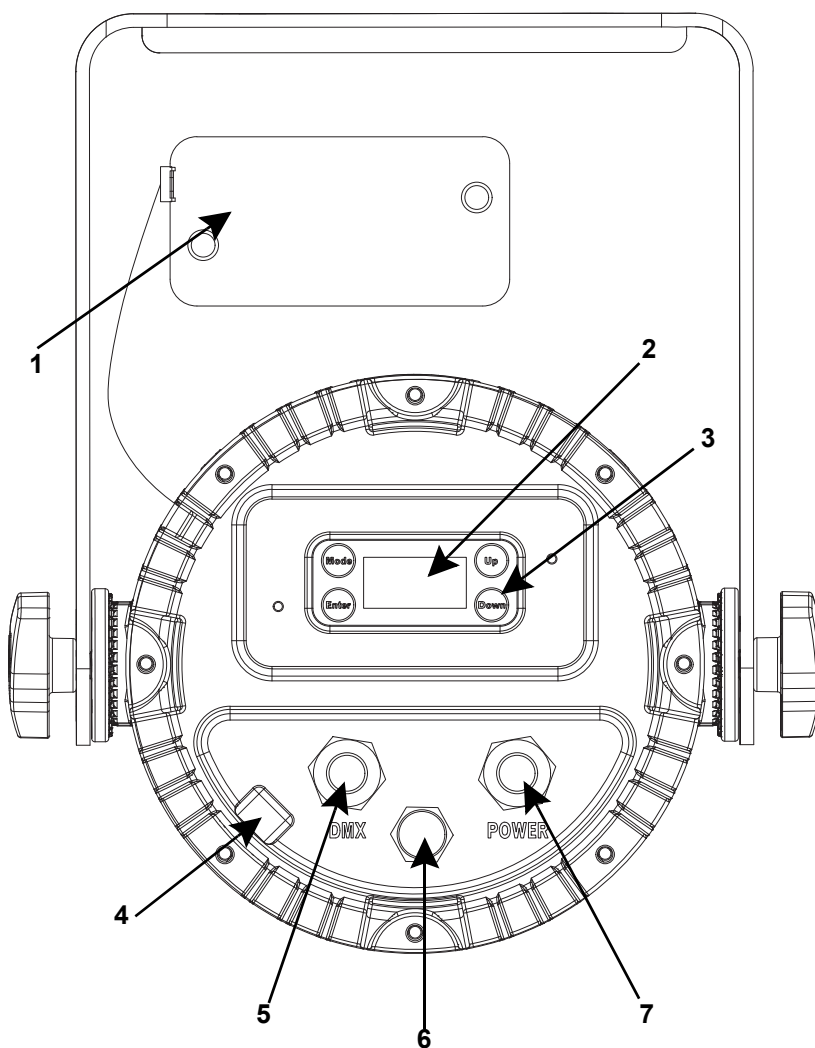


#	Name	#	Name
1	Cover plate	5	DMX in
2	LED display	6	Gore valve
3	Menu buttons	7	Power in
4	Safety cable pass through		



- Exposure to sunlight accelerates degradation of the product's OLED display. The cover plate provides UV protection.
- The cover plate does not waterproof the display.

Product Dimensions

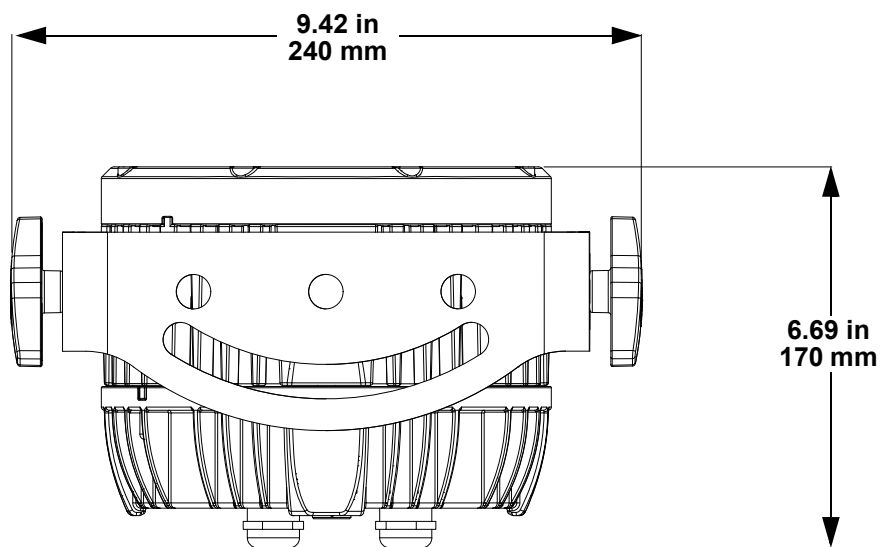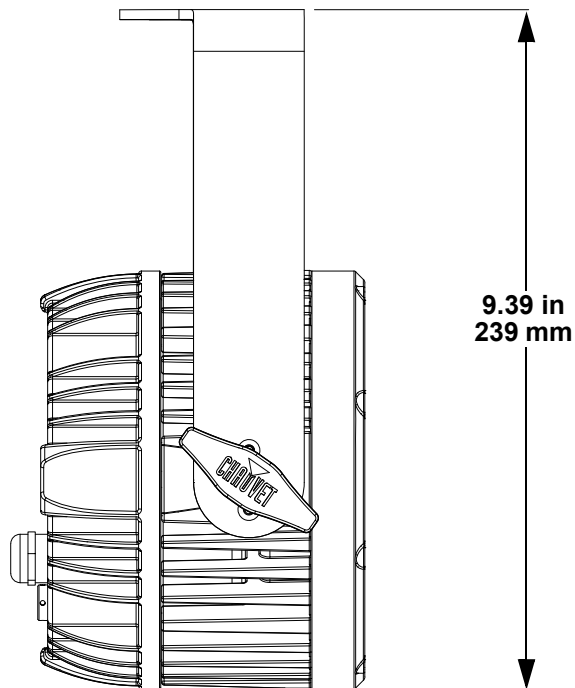

3. Setup

AC Power

The COLORdash Par H7XM has an auto-ranging power supply and it can work with an input voltage range of 100 to 240 VAC, 50/60 Hz.

To determine the product's power requirements (circuit breaker, power outlet, and wiring), use the current value listed on the label affixed to the product's back panel, or refer to the product's specifications chart.

The listed current rating indicates the product's average current draw under normal conditions.



- **Always connect the product to a protected circuit (a circuit breaker or fuse). Ensure the product has an appropriate electrical ground to avoid the risk of electrocution or fire.**
- **To eliminate unnecessary wear and improve its lifespan, during periods of non-use completely disconnect the product from power via breaker or by unplugging it.**



Never connect the product to a rheostat (variable resistor) or dimmer circuit, even if the rheostat or dimmer channel serves only as a 0 to 100% switch.

AC Plug

The COLORdash Par H7XM comes with a power input cable terminated with a hard-wired connection on one end and bare-wire on the other end (U.S. market). If it is necessary to add a plug to the product, use the table below to wire the plug.

Connection	Wire (U.S.)	Wire (Europe)	Screw Color
AC Live	Black	Brown	Yellow or Brass
AC Neutral	White	Blue	Silver
AC Ground	Green/Yellow	Green/Yellow	Green

Power Linking

It is possible to power link COLORdash Par H7XM products. See the table below for the current draw at each voltage and frequency:


	100 V, 60 Hz	120 V, 60 Hz	208 V, 60 Hz	230 V, 50 Hz	240 V, 50 Hz
Current Draw	0.77 A	0.64 A	0.37 A	0.34 A	0.32 A

Never exceed 12 A on a single circuit. Power-linking cables can be purchased separately.

DMX Connection

The COLORdash Par H7XM provides a DMX-512 connection using a bare-ended signal cable.

DMX Plug



DMX in	Function	Wire	DMX out
1	Ground	Ground	1
2	Data -	White/Orange	2
3	Data +	Green/Yellow	3
4	N/A	Red	4
5	N/A		5

Signal Cable



DMX Personalities

The COLORdash Par H7XM uses a hard-wire DMX data connection for its 5 DMX personalities, ranging from 6ch to 14ch.


- Refer to the [Operation](#) chapter to learn how to configure the COLORdash Par H7XM to work in these personalities.
- The [DMX Channel Assignments and Values](#) section provides detailed information regarding the DMX personalities.



For information about DMX standards, Master/Slave connectivity, or the DMX cables needed to link this product to a DMX controller, download the DMX Primer from the Chauvet website: www.chauvetprofessional.com.

Optional Junction Box installation

Users may elect to use a junction box when establishing a DMX connection. Refer to the junction box diagram below for the appropriate cabling.

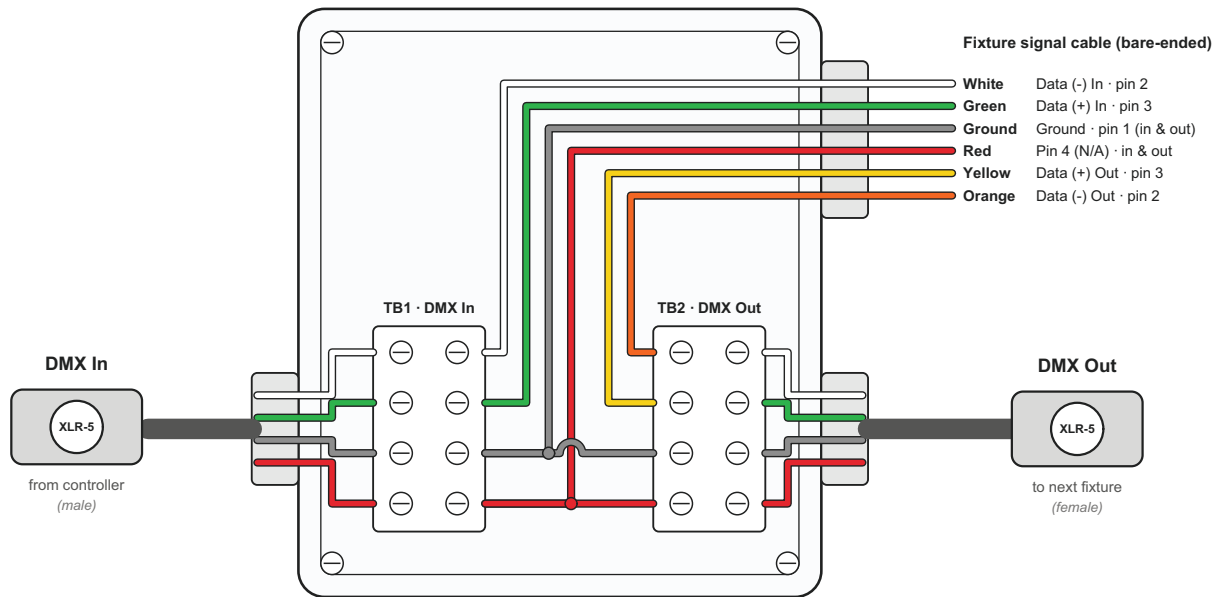

- The pinout lists white/orange (Data -) and Green/Yellow (Data +) as pairs. Either wire of each pair may be in or out, but this scheme must be consistent throughout installation.
- Terminate the last fixture in the DMX chain.

Remote Device Management

Remote Device Management, or RDM, is a standard for allowing DMX-enabled devices to communicate bi-directionally along existing DMX cabling. Check the DMX controller's User Manual or with the manufacturer as not all DMX controllers have this capability. The COLORdash Par H7XM supports RDM protocol that allows feedback to make changes to menu map options.

Master/Slave Connectivity

The Master/Slave mode allows an COLORdash Par H7XM (the master) to control one or more COLORdash Par H7XM products (the slaves) without a DMX controller. One COLORdash Par H7XM becomes the master when running an auto program or in Static mode.

Each slave's control panel must be configured to operate in Slave mode. During Master/Slave operation, the slaves will operate in unison with the master.




DO NOT connect a DMX controller to products operating in Master/Slave mode. The DMX controller signals may interfere with the signals from the master.



- The [Operation](#) section of this manual provides detailed instructions on how to configure the master and slaves.
- For more information about DMX standards or the DMX cables needed to link this product to a DMX controller, download the DMX primer from the Chauvet website: www.chauvetprofessional.com.

USB Software Update

The COLORdash Par H7XM allows for software update using the USB Firmware Upload adapter (sold separately). Use the table below to connect the USB adapter.

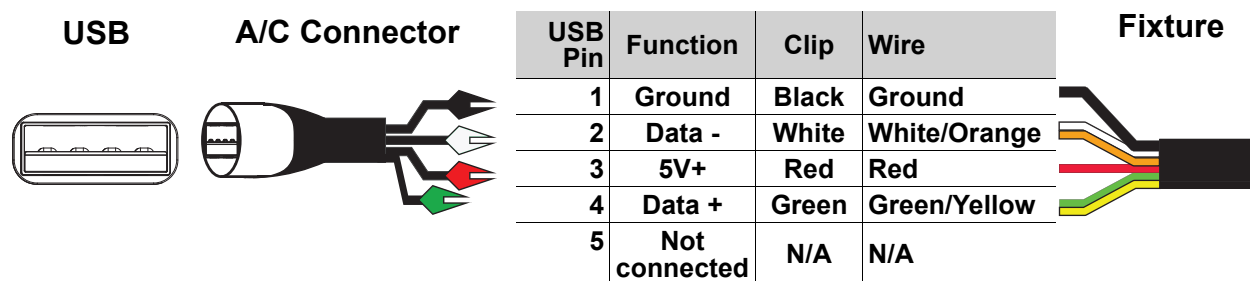

To update the software using a USB firmware upload adapter, do the following:

1. Power on the product and plug the flash drive into the USB firmware upload adapter.
2. Go to **"System Update"** on the main menu and press **<ENTER>**.
3. Scroll down through the directions on the display until **"NO"** and **"YES"** appear.
4. Select from **"NO"** (return to main menu), or **"YES"** (begin software update).
5. When the **"YES"** option is selected, the update will start. DO NOT turn off power or disconnect the USB during the process. The USB update can take several minutes to complete.
6. When the update is complete, the product will automatically reboot.
7. Go to the **Information** level of the product main menu and confirm the firmware revision.
8. When the boot-up process is finished, restart the product manually.



- Place the .chl file in the root directory of the USB drive.
- The product's USB port supports up to 32GB capacity and only works with FAT32 file format.



Turning off the power, removing the USB, or not setting the fixture to the correct protocol during the update can cause partial or total firmware failure in the targeted fixture(s).

Mounting

Before mounting the product, read and follow the safety recommendations indicated in the [Safety Notes](#).

Orientation

Always mount this product in a safe position, making sure there is adequate room for ventilation, configuration, and maintenance.

Rigging


Chauvet recommends using the following general guidelines when mounting this product.

- Before deciding on a location for the product, make sure there is easy access to the product for maintenance and programming purposes.
- Make sure that the structure and attachment points can support the weight before hanging the product (see the [Technical Specifications](#) for weight information).
- When mounting the product overhead, always use a safety cable. Mount the product securely to a rigging point, whether an elevated platform or a truss.
- When rigging the product onto a truss, use a mounting clamp of appropriate weight capacity.
- When power linking multiple products, mount the products close enough for power-linking cables to reach.
- The yoke adjustment knobs allow for directional adjustment when aiming the product to the desired angle. Only loosen or tighten the bracket knobs manually. Using tools could damage the knobs.

Procedure

The COLORdash Par H7XM comes with an adjustable bracket. The user can directly attach a mounting clamp (sold separately) to this bracket. Make sure the clamp is capable of supporting the weight of this product. For the Chauvet Professional line of mounting clamps, go to <http://chauvetprofessional.com/rigging/clamp/>.

Mounting Diagram

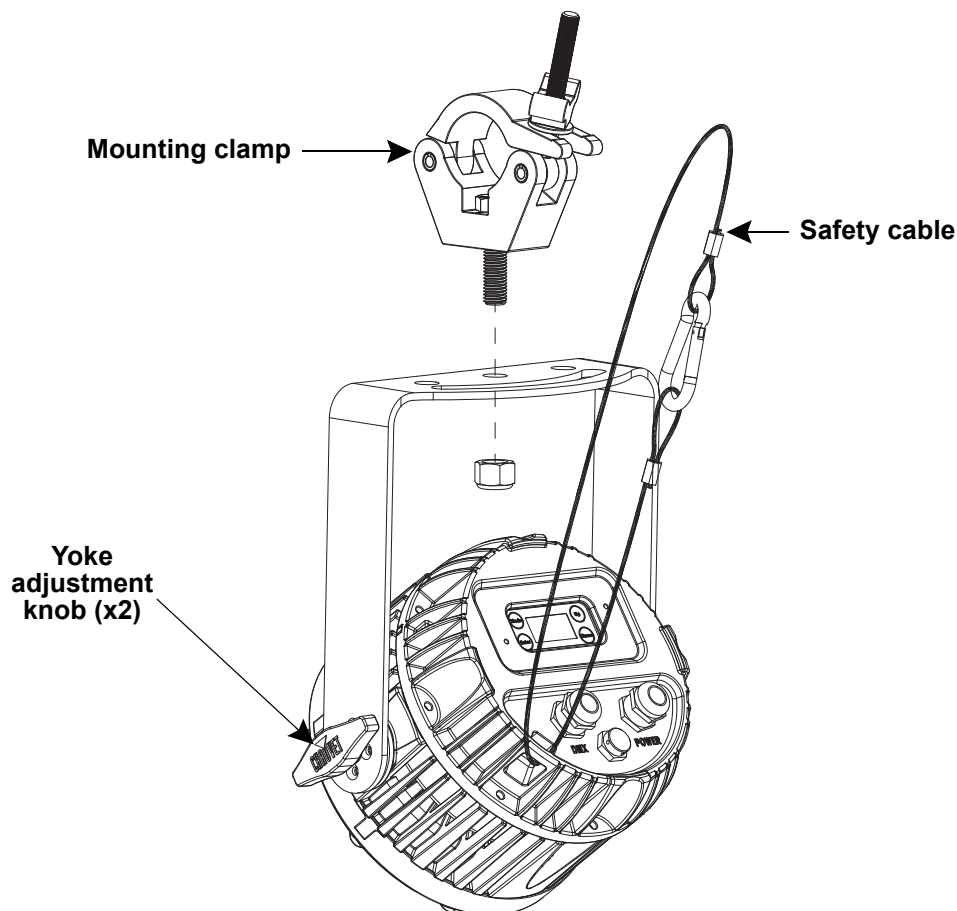

4. Operation

Control Panel Description

Button	Name	Function
	<Up>	Navigates upwards through the menu or increases the numeric value of a function
	<Menu>	Exits the current menu or function
	<Down>	Navigates downwards through the menu or decreases the numeric value of a function
	<Enter>	Enables the currently displayed menu or sets a selected value into a function

Control Options

Set the COLORdash Par H7XM starting address in the **001–499** DMX range. This enables control of up to 36 products in the 14-channel, **14CH** personality.

Programming

Refer to the menu map to understand the menu options. The menu map shows the main menu and a variable number of programming levels for each option.

- To access the main menu from the home screen, press **<MENU>**.
- To navigate to the desired option in the main menu, press **<MENU>** repeatedly until the option is indicated, or use **<UP>** or **<DOWN>** to navigate directly.
- Press **<ENTER>** to select the indicated option.
- Use **<UP>** or **<DOWN>** to navigate within a programming level until the desired option is indicated.
- Press and hold **<MENU>** to return to the home screen..

Passcode

When prompted, enter the following passcode: **<UP>**, **<DOWN>**, **<UP>**, **<DOWN>**, **<ENTER>**.

It is not possible to change this passcode.

Menu Map

Refer to the COLORdash Par H7XM product page on www.chauvetprofessional.com for the latest menu map.

Main Level	Programming Levels			Description
DMX Address	001–499			Selects DMX address (highest channel restricted to personality chosen)
DMX Channel	6CH			6-channel: RGBAW+UV
	8CH			8-channel: dimmer, RGBAW+UV, strobe
	9CH			9-channel: dimmer, 16-bit dimmer, RGBAW+UV, strobe
	13CH			13-channel: dimmer, RGBAW+UV, strobe, color macro, color temperature, auto program, auto speed, dimmer speed
	14CH			21-channel: dimmer, 16-bit dimmer, RGBAW+UV, strobe, color macro, color temperature, auto program, auto speed, dimmer speed
Static	Fixed Color	R	Dimmer 000–255	Red
		G		Green
		B		Blue
		A		Amber
		W		White
		UV		Ultraviolet (UV)

Main Level	Programming Levels			Description
Static (cont.)	Fixed Color (cont.)	RG	Dimmer 000–255	Red and green
		RB		Red and blue
		RA		Red and amber
		RW		Red and white
		RUV		Red and UV
		GB		Green and blue
		GA		Green and amber
		GW		Green and white
		GUV		Green and UV
		BA		Blue and amber
		BW		Blue and white
		BUV		Blue and UV
		AW		Amber and white
		AUV		Amber and UV
		WUV		White and UV
		RGB		Red, green, and blue
		RG		Red, green, and amber
		RGW		Red, green, and white
		RGUV		Red, green, and UV
		RBA		Red, blue, and amber
		RBW		Red, blue, and white
		RBUV		Red, blue, and UV
		RAW		Red, amber, and white
		RAUV		Red, amber, and UV
		RWUV		Red, white, and UV
		GBA		Green, blue, and amber
		GBW		Green, blue, and white
		GBUV		Green, blue, and UV
		GAW		Green, amber, and white
		GAUV		Green, amber, and UV
		GWUV		Green, white, and UV
		BAW		Blue, amber, and white
		BAUV		Blue, amber, and UV
		BWUV		Blue, white, and UV
		AWUV		Amber, white, and UV
		RGBA		Red, green, blue, and amber
		RGBW		Red, green, blue, and white
		RGBUV		Red, green, blue, and UV
		RGAW		Red, green, amber, and white
		RG		Red, green, amber, and UV
		RGWUV		Red, green, white, and UV
		RBAW		Red, blue, amber, and white
		RBAUV		Red, blue, amber, and UV
		RBWUV		Red, blue, white, and UV
		RAWUV		Red, amber, white, and UV
		GBAW		Green, blue, amber, and white
		GBAUV		Green, blue, amber, and UV
		GBWUV		Green, blue, white, and UV
		GAWUV		Green, amber, white, and UV

Main Level	Programming Levels			Description
Static (cont.)	Fixed Color (cont.)	BAWUV	Dimmer 000–255	Blue, amber, white, and UV
		RGBAW		Red, green, blue, amber, and white
		RGBAUUV		Red, green, blue, amber, and UV
		RGBWUV		Red, green, blue, white, and UV
		RGAWUV		Red, green, amber, white, and UV
		RBAWUV		Red, blue, amber, white, and UV
		GBAWUV		Green, blue, amber, white, and UV
		RGBAWUV		Red, green, blue, amber, white, and UV
	Color Temperature	Warm White 1		Preset white color temperatures.
		Warm White 2		
		Warm White 3		
		Neutral White 1		
		Neutral White 2		
		Neutral White 3		
		Daylight 1		
		Daylight 2		
		Daylight 3		
		Daylight 4		
	Manual Color Mixer	Red	000–255	Combine red, green, blue, and white to make a custom color temperature
		Green		
		Blue		
		Amber		
		White		
		UV		
Auto Show	Auto 1–5	001–100		Selects automatic programs and program speed
Master/Slave	Master			DMX mode (Master)
	Slave			Slave mode
Dimmer Speed	Off			Liner dimmer
	Dimmer 1–3			Dimmer speed, fast (1) to slow (3)
White Balance	Off			Uses factory default white setting
	Manual	Red	125–255	Sets red LED maximum value
		Green		Sets green LED maximum value
		Blue		Sets blue LED maximum value
		Amber		Sets amber LED maximum value
		White		Sets white LED maximum value
		UV		Sets UV LED maximum value
LED Frequency	600Hz			Sets the PWM frequency
	1200Hz			
	2000Hz			
	4000Hz			
	6000Hz			
	25KHz			
Back Light	10S			Turns off display backlight after 10 seconds of inactivity
	30S			Turns off display backlight after 30 seconds of inactivity
	2Min			Turns off display backlight after 2 minutes of inactivity
	Always On			Display backlight always on

Operation

Main Level	Programming Levels		Description
Key Lock	On		Locks display (password is <UP>, <DOWN>, <UP>, <DOWN>, <ENTER>)
	Off		
Information	Fixture Hours	<_ _ _ _ H>	Shows total hours the product has been powered on
	Version	<V _ . _>	Shows current firmware version
	UID	<_ _ _ _ _>	Shows product UID
Factory Reset	NO		Resets the product to factory default settings
	YES		
System Update	NO		Update firmware via Upload 10 (sold separately)
	YES		

DMX Configuration

Use control configurations to operate the product with a DMX controller.

DMX Personalities

To set the DMX personality:

1. Go to the **DMX Channel** main level.
2. Select the desired personality, from **6CH**, **8 CH**, **9CH**, **13CH**, or **14CH**.



- See the [Starting Address](#) section for the highest selectable starting address for each personality.
- Make sure that the starting addresses on the various products do not overlap due to the new personality setting.

Starting Address

Each product will respond to a unique starting address from the controller. All products with the same starting address will respond in unison. To set the starting address in DMX mode:

1. Go to the **DMX Address** main level.
2. Select the starting address (**001–512**).

Personality	Highest Address	Products per Universe
6CH	507	85
8CH	505	64
9CH	504	57
13CH	500	39
14CH	499	36

DMX Channel Assignments and Values

14CH / 13CH

13	14	Function	Value	Percent/Setting
1	1	Dimmer	000 ⇄ 255	0–100%
–	2	Fine dimmer	000 ⇄ 255	0–100%
2	3	Red	000 ⇄ 255	0–100%
3	4	Green	000 ⇄ 255	0–100%
4	5	Blue	000 ⇄ 255	0–100%
5	6	Amber	000 ⇄ 255	0–100%
6	7	White	000 ⇄ 255	0–100%
7	8	UV	000 ⇄ 255	0–100%
8	9	Strobe	000 ⇄ 010 011 ⇄ 255	No function Strobe, slow to fast
9	10	Color macro	000 ⇄ 010 011 012 ⇄ 029 030 031 ⇄ 049 050 051 ⇄ 069 070 071 ⇄ 089 090 091 ⇄ 109 110 111 ⇄ 129 130 131 ⇄ 149 150 151 ⇄ 169 170 171 ⇄ 200 201 ⇄ 255	No function Red full Red full, green increases Red and green full Green full, red decreases Green full Green full, blue increases Green and blue full Blue full, green decreases Blue full Blue full, red increases Red and blue full Red full, blue decreases Red full Red full, green and blue increase Red, green, and blue full Blue full, red and green decrease Blue full Red, green, and blue full Color temperature, warm to cool
10	11	Color temperature	000 ⇄ 005 006 ⇄ 025 026 ⇄ 050 051 ⇄ 075 076 ⇄ 100 101 ⇄ 125 126 ⇄ 150 151 ⇄ 175 176 ⇄ 200 201 ⇄ 225 226 ⇄ 250 251 ⇄ 255	No function Warm white 1 Warm white 2 Warm white 3 Neutral white 1 Neutral white 2 Neutral white 3 Daylight 1 Daylight 2 Daylight 3 Daylight 4 No function

13	14	Function	Value	Percent/Setting
11	12	Automatic program	000 ⇔ 010	No function
			011 ⇔ 060	Automatic program 1
			061 ⇔ 110	Automatic program 2
			111 ⇔ 160	Automatic program 3
			161 ⇔ 210	Automatic program 4
			211 ⇔ 255	Automatic program 5
12	13	Program speed	000 ⇔ 255	Automatic program speed, slow to fast
13	14	Dimmer mode	000 ⇔ 051	Preset dimmer speed from display menu
			052 ⇔ 101	Linear dimmer
			102 ⇔ 152	Dimmer mode 1 (fastest)
			153 ⇔ 203	Dimmer mode 2
			204 ⇔ 255	Dimmer mode 3 (slowest)

9CH / 8CH / 6CH

6	8	9	Function	Value	Percent/Setting
–	1	1	Dimmer	000 ⇔ 255	0–100%
–	–	2	Fine dimmer	000 ⇔ 255	0–100%
1	2	3	Red	000 ⇔ 255	0–100%
2	3	4	Green	000 ⇔ 255	0–100%
3	4	5	Blue	000 ⇔ 255	0–100%
4	5	6	Amber	000 ⇔ 255	0–100%
5	6	7	White	000 ⇔ 255	0–100%
6	7	8	UV	000 ⇔ 255	0–100%
–	8	9	Strobe	000 ⇔ 010	No function
				011 ⇔ 255	Strobe, slow to fast

Standalone Configuration

Static Mode

Fixed Color

To select a preset fixed color combination:

1. Go to the **Static** main level.
2. Select **Fixed Color** option.
3. Select the desired combination of **R** (red), **G** (green), **B** (blue), **A** (amber), **W** (white), and/or **UV** (ultraviolet), from **R, G, B, A, W, UV, RG, RB, RA, RW, RUV, GB, GA, GW, GUV, BA, BW, BUW, AW, AUV, WUV, RGB, RGA, RGW, RGUV, RBA, RBW, RBUV, RAW, RAUV, RWUV, GBA, GBW, GBUV, GAW, GAUV, GWUV, BAW, BAUV, BWUV, AWUV, RGBA, RGBW, RGBUV, RGAW, RGAUV, RGWUV, RBAW, RBAUV, RBWUV, RAWUV, GBAW, GBAUV, GBWUV, GAWUV, BAWUV, RGBAW, RGBAUW, RGBWUV, RGAWUV, RBAWUV, GBAWUV, or RGBAWUV.**

Color Temperature

To select a preset color temperature:

1. Go to the **Static** main level.
2. Select the **Color Temperature** option.
3. Select the color temperature, from **Warm White 1, Warm White 2, Warm White 3, Neutral White 1, Neutral White 2, Neutral White 3, Daylight 1, Daylight 2, Daylight 3, or Daylight 4.**

Manual Color Mixer

To manually mix a custom static color:

1. Go to the **Static** main level.
2. Select **Manual Color Mixer.**
3. Select the color to edit (**Red, Green, Blue, Amber, White, or UV**).
4. Set the value for the selected color (**0–255**).
5. Repeat steps 3 and 4 until product outputs as desired.

Auto Show

To select an automatic program:

1. Go to the **Auto show** main level.
2. Select the program, from **Auto 1–5**.
3. Set the program speed, from **001–100**.

Settings Configuration

Master/Slave

The Master/Slave mode allows a group of COLORdash Par H7XM products (the slaves) to simultaneously duplicate the output of another COLORdash Par H7XM (the master) without a DMX controller.

To set each of the slaves:

1. Go to the **Master/Slave** main level
2. Select **Slave**.

To set the master:

1. Go to the **Master/Slave** main level
2. Select **Master**.
3. Select a standalone setting.



- The master is the one that runs a program whether in Auto or Static mode.
- Do not connect a DMX controller to the products configured for Master/Slave operation. The DMX controller may interfere with signals from the master.
- The master should be the first product in the daisy chain.

Dimmer Speed

This setting determines how fast the output of the COLORdash Par H7XM changes when the output value is modified. It provides four different options to simulate the dimming curve of an incandescent lighting product. To select a specific dimmer profile, do the following:

1. Go to the **Dimmer Speed** main level.
2. Select a dimmer curve (**Off**, **Dimmer 1**, **Dimmer 2**, or **Dimmer 3**).



- Off**: The output is proportional (linear) to the dimmer channel value.
- Dimmer 1–3**: The output follows the dimmer value based on the corresponding dimmer curve, **Dimmer 1** being the fastest.

White Balance

This setting determines the maximum output values for each color, which affects the appearance of the total color output.

1. Go to the **White Balance** main level.
2. Select from **Off** (uses factory default white setting) or **Manual** (uses a custom white balance).
3. Select the color value to alter from **Red**, **Green**, **Blue**, **Amber**, **White**, or **UV**.
4. Set the maximum value of the selected color, from **125–255**.

LED Frequency

To adjust the frequency of the pulse width modulation:

1. Go to the **LED Frequency** main level.
2. Select the frequency from **600Hz**, **1200Hz**, **2000Hz**, **4000Hz**, **6000Hz**, or **25KHz**.

Back Light

To set how long before an inactive display will turn off:

1. Go to the **Back Light** main level.
2. Select the length of the backlight timer from **10S** (10 seconds), **30S** (30 seconds), **2Min** (2 minutes), or **Always On**.

Key Lock

To lock the display with a passcode:

1. Go to the **Key Lock** main level.
2. Select **On** (lock the display) or **Off** (unlock the display).

Operation

Information

To view essential product information:

1. Go to the **Information** main level.
2. Select **Fixture Hours**, **Version**, or **UID**.

Factory Reset

To reset the product to factory settings:

1. Go to the **Reset Factory** main level.
2. Select **NO** (to cancel) or **YES** (to reset the product configuration).

System Update

To update the firmware with a USB to DMX adapter cable:

1. Go to the **System Update** main level.
2. Follow the instructions (**Save the update file to a USB stick then connect it to the UPLOAD 10 to continue with the update**).
3. Select **NO** (to cancel) or **YES** (to update the firmware).

5. Maintenance

Marine Fixture Maintenance

Overview

Chauvet coats fixtures intended for marine environments with C5-M, C5-H, or CX paint to provide enhanced protection against damage in both inshore and offshore areas of high salinity. However, even with the enhanced protection, exposure to marine conditions may cause damage to the fixture without proper maintenance. Scratches, salt, and mineral accumulation may degrade the fixture's protective coating and expose underlying metal if not cleaned properly. In marine environments, you should inspect and clean the product's protective coating regularly to preserve the underlying metal and minimize wear on the product.

Maintenance

To preserve the coating of the product, exterior maintenance is recommended at least twice a month. To properly maintain the exterior of the product:

1. Unplug the product from power.
2. Rinse off any loose dirt.



Use a low-pressure, freshwater spray to rinse off the product. High pressure or saltwater sprays may incur damage.

3. Scrub with a soft brush to remove dust collected on the external surface/vents.
4. Rinse thoroughly.



Even if the luminaires are NOT in use, maintenance is still required due to the fixture's environment. During periods of non-use, periodically wipe the fixture with a clean, soft cloth. Only dampen this cloth with freshwater or an alcohol-based cleaner. Abrasive, alkaline, or acid cleaners may incur damage to the fixture.

5. Clean the external glass.



- **Only use an optical glass cleaner. DO NOT use Windex or other kinds of multi-surface cleaner as ammonia will damage the glass.**
- **Only spray the cleaner on a microfiber or 100% cotton cloth. DO NOT spray cleaner on the glass.**



- **Always dry the transparent surfaces carefully after cleaning them.**
- **Always replace the display cover when the display is not in use to protect it from environmental conditions.**

Maintenance

Torque Measurements

To maintain the IP rating when reassembling the product, use the given torque measurements for each of the following screws and bolts:

Fixture Parts	Torque Rating (Kgf.cm)	Torque Rating (lbf.in)
Allen Key screws holding in front lens cover	23.5	20.5
Allen Key screws head covers	24.5	21.24

Vacuum Test Measurements

Use the IP Tester from Chauvet Professional to ensure the product has been reassembled correctly by following the information below:

Parameters	Values
Method	Positive
Test pressure	15 kPa
Test duration	60 seconds
PASS state leak pressure	<0.1 kPa

6. Technical Specifications

Dimensions and Weight

Length	Width	Height	Weight
9.39 in (238.6 mm)	6.69 in (170 mm)	9.42 in (239.5 mm)	7.8 lb (3.5 kg)

Note: Dimensions in inches are rounded.

Power

Power Supply Type	Range	Voltage Selection
Switching (internal)	100 to 240 VAC, 50/60 Hz	Auto-ranging

Parameter	100 V, 60 Hz	120 V, 60 Hz	208 V, 60 Hz	230 V, 50 Hz	240 V, 50 Hz
Consumption	76 W	75 W	74 W	73 W	73 W
Operating Current	0.76 A	0.63 A	0.37 A	0.34 A	0.37 A

Power I/O	U.S./Worldwide	UK/Europe
Power Input Connector	Termination-ready bare-end	Termination-ready bare-end

Light Source

Type	Color	Quantity	Power	Lifespan
LED	RGBWA+UV	7	12 W	50,000 hours

Photometrics

Beam Angle		Field Angle
20.3°		37.2°
Illuminance @ 5 m	Lumens	Color Temperature at Full
749 lux	2956 lm	21549 K

Thermal

Maximum External Temperature	Cooling System
113 °F (45 °C)	Convection

Control

DMX Connector	Channel Range
Termination-ready bare-end	6, 8, 9, 13, or 14

Ordering

Product Name	Item Name	Item Code	UPC Number
COLORdash Par H7XM	COLORDASHPARH7XM	10032696	781462230449



UL 1573
CSA C22.2 No. 166
E113093



RoHS



Contact Us

General Information	Technical Support
Chauvet World Headquarters	
Address: 3360 Davie Rd., Suite 509 Davie, FL 33314 Voice: (954) 577-4455 Fax: (954) 929-5560 Toll Free: (800) 762-1084	Voice: (844) 393-7575 Fax: (954) 756-8015 Email: chauvetcs@chauvetlighting.com Website: www.chauvetprofessional.com
Chauvet U.K.	
Address: Pod 1 EVO Park Little Oak Drive, Sherwood Park Nottinghamshire, NG15 0EB UK Voice: +44 (0) 1773 511115 Fax: +44 (0) 1773 511110	Email: UKtech@chauvetlighting.eu Website: www.chauvetprofessional.eu
Chauvet Benelux	
Address: Vaartlaan 9 9800 Deinze Belgium Voice: +32 9 388 93 97	Email: BNLtech@chauvetlighting.eu Website: www.chauvetprofessional.eu
Chauvet France	
Address: 3, Rue Ampère 91380 Chilly-Mazarin France Voice: +33 1 78 85 33 59	Email: FRtech@chauvetlighting.fr Website: www.chauvetprofessional.eu
Chauvet Germany	
Address: Bruno-Bürgel-Str. 11 28759 Bremen Germany Voice: +49 421 62 60 20	Email: DEtech@chauvetlighting.de Website: www.chauvetprofessional.eu
Chauvet Mexico	
Address: Av. de las Partidas 34 - 3B (Entrance by Calle 2) Zona Industrial Lerma Lerma, Edo. de México, CP 52000 Voice: +52 (728) 690-2010	Email: servicio@chauvet.com.mx Website: www.chauvetprofessional.mx

Warranty & Returns

For warranty terms and conditions and return information, please visit our website.

For customers in the United States and Mexico: www.chauvetlighting.com/warranty-registration.

For customers in the United Kingdom, Republic of Ireland, Belgium, the Netherlands, Luxembourg, France, and Germany: www.chauvetlighting.eu/warranty-registration.