


F2

A high-performance 2.9 mm pixel pitch LED video panel featuring a high-contrast display and 3,840 Hz refresh rate for crisp, high-quality imagery, engineered with a lightweight, magnetic, and serviceable design for easy setup.

Ideal for corporate events, high-resolution IMAG, and any application requiring sharp, detailed visuals at a close viewing distance.

- Delivers superior image depth and detail with high-quality black body LEDs and 16-bit grayscale.
- Provides smooth, accurate LED dimming for excellent on-camera performance with S-PWM technology.
- Features a lightweight magnesium housing strong enough to hang up to 23 panels vertically.
- Simplifies maintenance and ensures color uniformity with intelligent, hot-swappable magnetic modules.
- Supports hanging, stacking, and wall mounting with magnetic assisted alignment for rapid deployment.
- Increases operational stability for critical applications with built-in dual power supply redundancy.

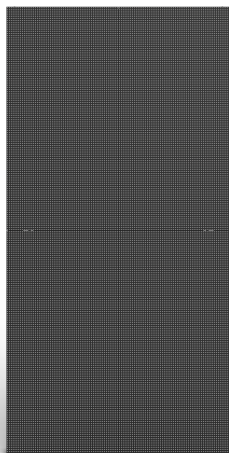

SPECIFICATIONS

Optical

Pixel Pitch: 2.9 mm

Certifications / Qualifications

IP Rating: IP20