


## STRIKE V

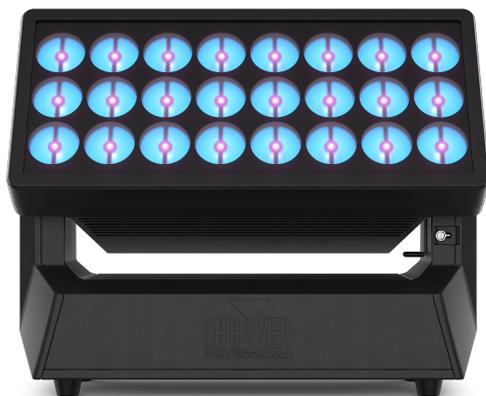

This IP65-rated, motorized tilting strobe and wash hybrid delivers dynamic dual-layer pixel effects, vibrant multicolor washes, and powerful strobe capabilities. Perfectly suited for touring productions, large-scale concerts, and outdoor festivals requiring robust, high-impact, and weather-resistant lighting effects.

- Features 48 individually controllable quad-color RGBW LEDs across two distinct layers for dynamic effects.
- Features a rugged, IP65-rated housing, ensuring dependable operation in any outdoor environment.
- An integrated variable electronic frost filter instantly changes the beam angle for versatile wash effects.
- Delivers a wide 180° motorized tilt range for precise and dynamic fixture positioning.
- Supports versatile control options including DMX, RDM, Art-Net, and sACN protocols.
- Includes a magnetic stealth filter to completely conceal the LED pixels when not in use.

### SPECIFICATIONS

#### Optical

**Light Source:** 24 LEDs top plate (quad-color RGBW), 6W, 50,000 hours life expectancy

**Light Source:** 24 LEDs bottom plate (quad-color RGBW), 50W, 50,000 hours life expectancy

**Beam Angle (Combine):** 9.9°

**Beam Angle (Dot):** 105.7°

**Beam Angle (Cell):** 9.9°

**Beam Angle (w/E-Frost Combine):** 50.3°

**Beam Angle (w/E-Frost Dot):** 103.1°

**Beam Angle (w/E-Frost Cell):** 46.8°

**Field Angle (Combine):** 17.6°

**Field Angle (Top Plate):** 153.1°

**Field Angle (Cell):** 17.5°

**Field Angle (w/E-Frost Combine):** 125°

**Field Angle (w/E-Frost Dot):** 155.6°

**Field Angle (w/E-Frost Cell):** 117.2°

**Lumens (Combine):** 19,589

**Lumens (Dot):** 1,912

**Lumens (Cell):** 17,127

**Lumens (w/E-Frost Combine):** 13,406

**Lumens (w/E-Frost Dot):** 1,633

**Lumens (w/E-Frost Cell):** 15,769

**Illuminance (Combine):** 16,779 lux @ 5 m

**Illuminance (Dot):** 29 lux @ 5 m

**Illuminance (Cell):** 16,789 lux @ 5 m

**Illuminance (w/E-Frost Combine):** 539 lux @ 5 m

**Illuminance (w/E-Frost Dot):** 26 lux @ 5 m

**Illuminance (w/E-Frost Cell):** 536 lux @ 5 m

**Selectable PWM:** 1000Hz, 2000 Hz, 4000 Hz, 6000 Hz, 25000 Hz, 64,000 Hz

#### Dynamic Effects

**Tilt:** 180°

**Tilt Ranges:** 0° to 180°

**Dimmer:** Electronic

**Shutter/Strobe:** Electronic

**Strobe Rate:** 0 to 30 Hz

**Standalone Color Mixing:** Yes

**Dim Modes:** 4

**Built-in Automated Programs:** Yes

#### Construction / Physical

**Dimensions:** 16 x 7.3 x 12.2 in (407 x 187.4 x 310 mm)

**Weight:** 36 lb (16.3 kg)

**Exterior Color:** Black

**Housing Material:** AZ91D Magnesium diecast

#### Connections

**Power Connection:** Edison (Local) plug to Seetronic Powerkon IP65

**Power Input:** Seetronic Powerkon IP65

**Data Connectors:** 5-pin IP65 XLR, Seetronic etherCON IP65

**Cable Length (power):** 5 ft (1.5 m)

## Control

**Control Protocol:** Art-Net, DMX, RDM, sACN

**DMX, ArtNet, and sACN Channels Dual mode Movement:** 30

**DMX, ArtNet, and sACN Channels Dual Mode Pixels:**

144,192,240,288

**ArtNet and sACN Channels Multi-Layer Control Movement:** 30

**ArtNet and sACN Channels Multi-Layer Control Dot Pixels:**

72,96,120,144

**ArtNet and sACN Channels Multi-Layer Control Cell Pixels:**

72,96,120,144

## Electrical

**Input Voltage:** 100 to 240 VAC, 50/60 Hz (auto-ranging)

**Power and Current:** 747 W, 7.54 A @ 100 V, 60 Hz

**Power and Current:** 747 W, 6.20 A @ 120 V, 60

**Power and Current:** 719 W, 3.63 A @ 208 V, 60 Hz

**Power and Current:** 717 W, 3.28 A @ 230 V, 50 Hz

**Power and Current:** 717 W, 3.17 A @ 240 V, 50 Hz

## Battery

**Battery type:** Lithium Ion

**Rechargeable:** Yes

## Certifications / Qualifications

**Certifications:** CE, MET, ROHS, FCC

**IP Rating:** IP65, temporary outdoor/wet use, with pressure equalizing M12 GORE valve

**Temperature (Ambient):** 14 °F to 113 °F (-10 °C to 45 °C)

**Temperature (Ambient):** 14 °F to 113 °F (-10 °C to 45 °C)

## Optional Accessories

Professional Clamps: CTC-50HC, CTC-50HCN

Safety Cable: SC-08

IP Rated Seetronic® Powerkon Extensions

IP Rated DMX cables

IP Rated EtherCon Cables

UPLOAD 03 software uploader

## What's Included

STRIKE V

Seetronic Powerkon IP65 power cord

Omega bracket

Stealth filter