


WELL PANEL X

A battery-powered, high-CRI LED panel light offering superior color mixing and up to 18 hours of runtime in a fixture designed for quick and flexible deployment. Perfect for rental houses and lighting professionals on any production, indoors or out, requiring a high-quality, deployable key light where quick setup and flexibility are essential.

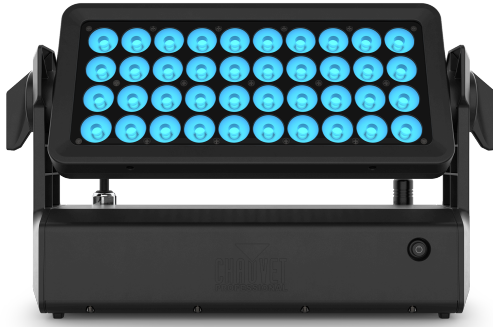

- Delivers exceptional color rendering with 40 RGBWW LEDs and a wide 2800K to 6500K CCT range.
- Provides flexible power management with selectable 5, 8, 12, and 18-hour battery runtimes.
- Ensures reliable all-weather operation with a rugged, IP65-rated housing and connectors.
- Offers versatile control options including DMX, CRMX, RDM, RF, and wireless app connectivity.
- Features adjustable PWM to ensure flicker-free performance for on-camera applications.
- Simplifies logistics with a road case that charges four units at once for rapid deployment.

SPECIFICATIONS

Optical

Light Source: 40 LEDs (RGBWW) 13.2 W, (556 mA), 50,000 hours life expectancy

Color Temperature (range): 2800 to 6500 K

Installed optics: 11.6°

Beam Angle: 21.4°

Field Angle: 31.7°

Lumens: 6865 lm (AC power)

Illuminance: 4575 lux @ 5 m (AC power)

Lumens: 6615 lm (OFF battery setting)

Illuminance: 4269 lux @ 5 m (OFF battery setting)

Lumens: 2886 lm (5-hour battery setting)

Illuminance: 1867 lux @ 5 m (5-hour battery setting)

Lumens: 1807 lm (8-hour battery setting)

Illuminance: 1194 lux @ 5 m (8-hour battery setting)

Lumens: 1189 lm (12-hour battery setting)

Illuminance: 769 lux @ 5 m (12-hour battery setting)

Lumens: 851 lm (18-hour battery setting)

Illuminance: 548 lux @ 5 m (18-hour battery setting)

Selectable PWM: 600 Hz, 1,200 Hz, 2,000 Hz, 4000 Hz, 6,000 Hz, 25000

Dynamic Effects

Dimmer: Electronic

Shutter/Strobe: Electronic

Strobe Rate: 0 to 30 Hz

Standalone Color Mixing: Yes

Color Temperature Presets: Yes

Dim Modes: 4

Dim Curves: 4

Built-in Automated Programs: Yes

Customizable Programs: No

Recall Custom Programs: No

Construction / Physical

Dimensions: 17.17 x 5.31 x 10.24 in (436 x 135 x 260 mm)

Dimensions case: 36.4 x 20.7 x 21.5 in (925 x 525 x 545 mm)

Weight: 20.8 lb (9.43 kg)

Weight case: 184 lb (83.5 kg)

Exterior Color: Black

Housing Material: Aluminum diecast

Connections

Power Connection: Edison (local) plug to Seetronic Powerkon IP65

Power Input (fixture and charging case): Seetronic Powerkon IP65

Power Output (fixture and charging case): Seetronic Powerkon IP65

Data Connectors: 5-pin XLR

Cable Length (power): 5 ft (1.5 m)

Control

Control Protocol: RDM, CRMX, NFC, RF

DMX Channels: 5,8,9,12,16 channels

Modes/Personalities: 5 personalities (5Ch, 8Ch, 9Ch, 12 ch, 16 ch)

Wireless WDMX "G" Compatibility: G4S

Wireless Lumen Radio Compatibility: CRMX

Electrical

Input Voltage: 100 to 240 VAC, 50/60 Hz (auto-ranging)

Single Unit:

Power Linking: 12 units @ 120 V; 21 units @ 208 V; 23 units @ 230 V

Power and Current: 120 W, 0.99 A @ 120 V, 60 Hz

Power and Current: 113 W, 0.56 A @ 208 V, 60 Hz

Power and Current: 115 W, 0.51 A @ 230 V, 50 Hz

4 Pack Case:

Power and Current: 550 W, 4.60 A @ 120 V, 60 Hz

Power and Current: 536 W, 2.62 A @ 208 V, 60 Hz

Power and Current: 522 W, 2.31 A @ 230 V, 50 Hz

Fuse: T6.3A, 250 V

Battery

Battery type: Lithium Ion

Rechargeable: Yes

Battery Charge Time: 4 hours

Battery Life: 5, 8, 12,18 hours

Battery Power: 44.4 V, 6600 mAh

Certifications / Qualifications

Certifications: CE, FCC, UKCA

IP Rating: IP65, temporary outdoor/wet use

Temperature (Ambient): -4 °F to 113 °F (-20 °C to 45 °C)

Optional Accessories

Clamps: CTC-50HC, CTC-50G, CTC-50CBLK, CTC 50HCN, CTC-50HCNBLK

45° hard filter pack (sold in singles)

60° hard filter pack (sold in singles)

100° hard filter pack (sold in singles)

10°x60° hard filter pack (sold in singles)

30°x60° hard filter pack (sold in singles)

60°x10° and 60°x40° soft filter pack (sold in 4 packs)

Empty filter frame for soft filters (sold in singles)

Rig Link PowerKon Extension cables

Rig Link 5 pin DMX Cables

What's Included

(4) WELL PANEL X

(1) 4 slot charging case

(1) basic RF controller

(4) Seetronic PowerKon IP 65 power cords

(4) Omega Brackets

(1) QRG